


Chipboard screws

Pozi (Pozidriv) countersunk, fully threaded, sizes 3mm to 6mm (No.4 to No.14).

DIMENSIONAL DIAGRAM

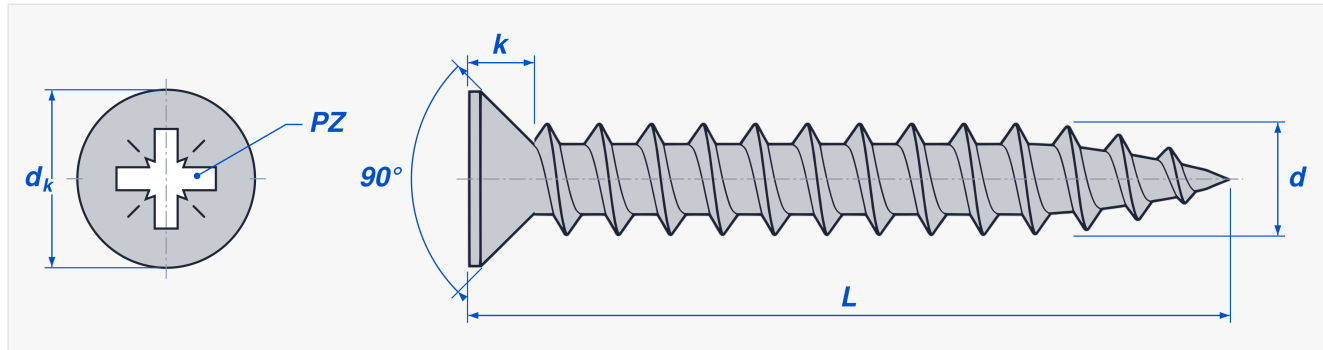

Length (L):

Measured overall, from the top of the head to the point.
On a countersunk screw the head IS included in the length.

Head angle: 90°

Use a standard 90° countersink bit for a flush fit.
US imperial flat head screws are 82°, so they differ.

METRIC SIZES, WITH A GAUGE AS A GUIDE

Example: 5mm is closest to a No.10

Chipboard screws are sold by metric size. The gauge is only a guide, so check d in the table.

FULLY THREADED: NO PLAIN SHANK

The thread runs right up to the head. Measure across the thread with a caliper. A new screw reads its size or a touch under.

DIMENSIONAL DATA - 3MM TO 6MM (NO.4 TO NO.14)

Size	Thread dia d nominal (mm)	Head dia dk min - max (mm)	Head height k max (mm)	Pozi bit size PZ
3mm (No.4)	3.0	5.6 - 6.0	1.9	PZ1
3.5mm (No.6)	3.5	6.6 - 7.0	2.1	PZ2
4mm (No.8)	4.0	7.5 - 8.0	2.5	PZ2
4.5mm (No.9)	4.5	8.5 - 9.0	2.7	PZ2
5mm (No.10)	5.0	9.5 - 10.0	3.0	PZ2
6mm (No.14)	6.0	11.5 - 12.0	3.6	PZ3

LENGTHS AVAILABLE - OVERALL LENGTH L, INCLUDING THE HEAD

Length mm	10	12	16	20	25	30	35	40	45	50	55	60	70	80	90	100	110	120	130	140	150
3mm (No.4)	●	●	●	●	●	●	●	●		●											
3.5mm (No.6)		●	●	●	●	●	●	●	●	●											
4mm (No.8)		●	●	●	●	●	●	●	●	●		●	●	●							
4.5mm (No.9)			●	●	●	●	●	●	●	●	●	●	●	●		●					
5mm (No.10)				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
6mm (No.14)				●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●



Scan to order pozi countersunk chipboard screws

All six sizes and every length on this sheet, in A2 stainless steel.
No minimum order. Same-day dispatch on orders before 1pm.

Or go to boltbase.com/pozi-chipboard-screws

Dimensions: All values in mm. d is nominal, dk is a range, k is a maximum. Pozi recess is cross recess type Z. Sizes vary between manufacturers.

Lengths: As listed on boltbase.com, October 2026. Screws are made to the mm length, head included.

Spot an error? Let us know - sales@boltbase.co.uk

